



CFD simulation of a thermoacoustic engine with coiled resonator[☆]

Florian Zink^{a,*}, Jeffrey Vipperman^b, Laura Schaefer^c

^a University of Pittsburgh, Department of Mechanical Engineering and Material Science, 225 Benedum Hall, Pittsburgh, PA 15261, United States

^b University of Pittsburgh, Department of Mechanical Engineering and Material Science, 531 Benedum Hall, Pittsburgh, PA 15261, United States

^c University of Pittsburgh, Department of Mechanical Engineering and Material Science, 153 Benedum Hall, Pittsburgh, PA 15261, United States

ARTICLE INFO

Available online 17 October 2009

Keywords:

Thermoacoustics
CFD simulation
Resonator curvature

ABSTRACT

Thermoacoustic energy conversion is based on the Stirling cycle. In their most basic forms, thermoacoustic devices are comprised of two heat exchangers, a porous medium, both placed inside a resonator. Work is created through the interaction of strong sound waves with the porous medium that is subject to external heating. This work explores the effect of resonator curvature on the thermoacoustic effect. A CFD analysis of a whole thermoacoustic engine was developed and the influence of a curved resonator on the thermoacoustic effect is discussed. The variation of pressure amplitude and operating frequency serves as metrics in this investigation. It was found that the introduction of curvature affects the pressure amplitude achieved. Severely curved resonators also exhibited a variation in operating frequency.

© 2009 Elsevier Ltd. All rights reserved.

1. Introduction

The thermodynamic cycle occurring in thermoacoustic heat engines (TAEs) as well as thermoacoustic refrigerators (TARs) is the Stirling cycle, which was developed in 1816 by Robert Stirling [1]. The original mechanical Stirling engine utilized two pistons and a regenerative heat exchanger [2]. Fig. 1 shows such an engine.

Over the course of one cycle, the working gas is compressed, and it then gives off heat to the heat sink, thus maintaining a constant temperature. Afterwards, the gas is heated at constant volume by the regenerator and then is heated further at the heat source. This heat supply occurs while the gas is allowed to expand and driving the power piston, again at constant temperature. After expansion, the gas is displaced to the heat sink, while cooling off at constant volume by depositing heat to the regenerator, which stores heat between cycle segments [2]. The transition to thermoacoustic technology occurred when Ceperley recognized that sound waves could replace the pistons for gas compression and displacement [3].

1.1. Thermoacoustic engines

The simplest thermoacoustic engines (TAEs) operate with a standing acoustic wave in a resonance tube. This wave causes pressure variations as well as gas displacement. In a quarter-wavelength resonator, comprised of a tube with one open end and one closed end, the pressure anti-node of the wave is located at the closed end. The velocity anti-node is located at the open end. When a gas is subject to such a standing wave

and it interacts with a solid wall that is subject to a (externally imposed) temperature gradient, pressure disturbances can be amplified to reach strong amplitudes. In practice, this interaction occurs within a porous regenerative unit commonly referred to as the “stack” in standing wave devices. Ceramic monolith structures are often used as stacks because they offer a large surface-to-volume ratio and exhibit desirable hydraulic performance. In order for amplification to occur, this temperature gradient within the porous medium must be larger than the critical temperature gradient. This critical temperature gradient is determined by the temperature changes the gas would undergo if it were under the influence of a sound wave in adiabatic conditions. The expression for this critical temperature gradient $\nabla T_{\text{crit}} = \frac{\omega p_1}{\rho_m c_p u_1}$ was derived by Swift [4]. It depends on the operating frequency ω , the first-order pressure and velocity in the standing wave p_1 and u_1 , as well as the mean gas density ρ_m and specific heat c_p .

In addition to the simple standing wave engine described above is the traveling wave engine. The difference between the standing wave and traveling wave engine lies in the phasing between velocity and pressure. In standing wave engines, the phasing is such that we need to artificially delay the transfer of heat by utilizing a porous structure with large channels [5] such as the ceramic monolith mentioned previously. In the traveling wave engine, the phasing is such that the heating can inherently occur *after* the compression and the cooling can occur *after* the expansion. Here, the flow channels can be designed much smaller [5]. Consequently, the temperature of the gas is almost always the same as the wall temperature, resulting in heat transfer over very small temperature differences. This process produces inherently less entropy, and is thus more efficient than the standing wave engine [6,7]. In summary, thermoacoustic engines create strong pressure oscillations inside a resonator. These oscillations can be used during a reversed Stirling cycle to provide cooling.

[☆] Communicated by W.J. Minkowycz.

* Corresponding author.

E-mail address: flz2@pitt.edu (F. Zink).

Nomenclature

c	Specific heat
f	Frequency
p	Pressure
T	Temperature
u	Velocity

Greek symbols

Δ	Change
λ	Wavelength
ω	Angular frequency
ρ	Density

Subscripts

1	First-order
crit	Critical
m	Mean, time averaged
p	Constant pressure

1.2. Thermoacoustic refrigeration

If strong sound waves interact with a porous stack their amplitude is attenuated, which withdraws thermal energy from the stack. Thermal energy is pumped from the stack's cold end (of temperature below ambient) to the exhaust end. Refrigerators and chillers driven by TAEs are a reality today; however they are limited to few, specialized uses, for example in gas liquefaction. The National Institute of Standards and Technology (NIST) in collaboration with Radebaugh built a TAR with 5 W of cooling power at 120 K and a low temperature at no load of 90 K [8]. The main benefit is the lack of moving parts (such as seals), thus reducing maintenance costs. It is noteworthy that TARs can achieve these low temperatures in a single stage, whereas VCRs can only achieve approximately 230 K in a single stage [8]. Cryogenic cooling is not the only application for TARs. A practical example of this design was given by Poesse with a freezer for ice cream storage. This small scale chiller featured an annular space around the regenerative unit to achieve traveling wave phasing [9].

The main reason, why TARs have not been implemented on a large scale is based on their inherently low coefficient of performance (COP), which is the ratio of input energy over cooling capacity. Note that it is not an efficiency in the classical sense and thus not bounded

by 1. One benchmark of cooling illustrates a spread of COP of traditional refrigeration between 2 and 6, varying with different working fluids and compressor efficiencies [10]. On the other hand, TARs are still operating at COPs of less than one [11]. One reason for this limitation is that the compression of the gas in TARs is more energy intensive than the compression of the liquid working fluid in VC refrigerators. Another limitation of the wide spread implementation is the physical size of thermoacoustic chillers. If the resonator could be coiled as opposed to being designed as a straight tube, the footprint of TAEs and TARs could be reduced and thus be advanced towards broader implementation. The effect of resonator curvature on the performance of TAEs and TARs is not understood. This work provides insights into the effect of curvature in general as well as the severity of curvature on the thermoacoustic effect and operating frequency.

2. Development of the CFD model

In order to investigate different resonator shapes quickly, we developed a computational fluid dynamics (CFD) simulation of a standing wave engine in Fluent. It generally follows the ideas introduced by Nijeholt et al. [12] and Hantschk and Vortmeyer [13].

2.1. Previous numerical simulations in thermoacoustics

Nijeholt used ANSYS CFX to simulate a traveling wave engine inside a Helmholtz resonator, mimicking the design built by Bastyr and Keolian [14]. They used a very coarse grid, and a time step that was just large enough to resolve the expected oscillations. Hantschk and Vortmeyer [13] used Fluent 4.4.4 to simulate a Rijke tube (which is similar to a classic thermoacoustic engine, except that the oscillations are created with one heated wire screen rather than a stack). In their boundary conditions the gas is given a thermal conductivity that is 10 times higher than the realistic value for room temperature. This corresponds to a Prandtl number that is 10 times lower than the real value for their gas at room temperature (which equals approximately 0.7). Entezam et al. [15] also utilized a CFD code to simulate thermoacoustic oscillations in a Rijke tube. In their case applied to a pulse combustor. The most recent previous example of a CFD simulation used to investigate the thermoacoustic effect was provided by Zoontjens [16]. This work considered a single “thermoacoustic couple”, i.e. the interaction of a single stack plate with an oscillating gas, as investigated by Ozoe et al. [17]. Zoontjens' model, was based on previous numerical simulation efforts (without using commercial codes) put forth by Cao et al. [18], Besnoin and co-worker [19,20] and Worlikar and Knio [21], Ishikawa and Mee [22], and Marx and Blanc-Benon [23–26], and finally Piccolo and Pistone [27]. These efforts were used largely to investigate the non-linear behavior of the temperature as a result of the interaction of the oscillations with the stack wall. Our group advanced the numerical simulation by accounting for several thermoacoustic couples through a simulation of a whole TAE.

2.2. CFD simulation of a whole TAE

Our model is based on a mechanically simple standing wave engine with a quarter-wavelength resonator and a porous stack located in the vicinity of the closed end. This standing wave engine was replicated in Gambit. The grid dimensions are 12 mm wide and 150 mm long. The stack of the engine is represented by several walls spaced 500 μm apart. These walls are given a non-zero thickness in order to participate in a heat exchange with the surrounding fluid. The grid is built using triangular cells, with a total cell count of approximately 36,000 cells. Triangular cells were chosen because it allowed to gradually increase the cell density (i.e. the node spacing on the walls by the stack is much smaller than on the closed wall boundary on the left) towards the stack region, where high accuracy in the

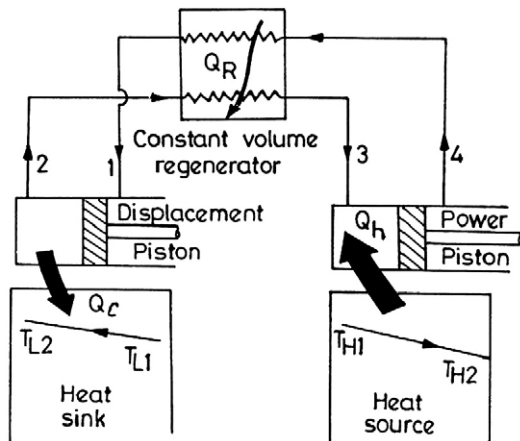


Fig. 1. Schematic of a Stirling engine [2].

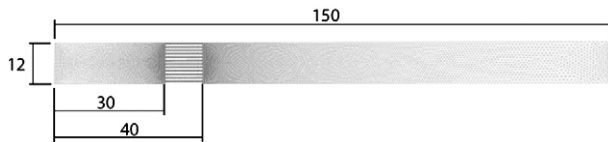


Fig. 2. The CFD mesh used for the TAE model.

representation of the flow behavior is most important. The mesh is shown in Fig. 2. It was found that the relative change in the pressure amplitude of the thermoacoustic oscillations from an engine with a curved resonator compared with the straight case is independent of the used grid. However, the qualitative nature of the results presented below must be stressed.

2.3. Boundary conditions

The simulation of our thermoacoustic engine was performed in Fluent Version 6.3.26. The model includes an open end (a 0 Pa gauge pressure “pressure outlet”) and a “pressure inlet” (for the initial disturbance) of a positive gauge pressure of 10 Pa. This creates a pressure gradient and a non-zero velocity distribution throughout the domain. In the present setup, the simulation uses adiabatic walls at the compliance, resonator and stack. The horizontal walls in the stack section are given a constant (with respect to time) temperature with a gradient from 700 K down to 300 K over a distance of 10 mm utilizing a user defined function (UDF). The heat transfer coefficient between the stack walls and the fluid is set to be 50 W/m² K, which is consistent with calculations performed by Liu and Garrett [28]. The equation of state used for the working gas is the ideal gas equation, which allows for temperature and pressure dependent variations of the gas' density. Viscous and turbulence effects are accounted for using the k - ϵ model. The time advancement is first-order, the pressure-velocity coupling uses the PISO scheme, and the discretization for all variables (pressure, density, momentum and energy) is second-order upwind. For the unsteady solution the pressure inlet condition on the compliance side was replaced by another adiabatic wall, to mimic the real engine. Although previous examples of CFD simulations exist in literature, the presented model is the first one to be used as a design tool through the investigation of various resonator geometries.

3. Results

With these boundary conditions in place, we were able to replicate the thermoacoustic effect with Fluent. After transitioning from the initial pressure disturbance, the simulation yielded strong sustained pressure oscillations as shown below in Fig. 3. The same figure also contains results from the first comparison between two different instances of resonator curvature. Thus, a model of an entire thermoacoustic engine with only heat as an input as well as its application as a tool to advance the designs of future thermoacoustic engines has been demonstrated. Below, the results from the variation of resonator curvature will be further elaborated on.

3.1. Effect of resonator curvature

Again, Fig. 3 shows the transition of the oscillations from the initial disturbance to the “limit cycle” (as referred to by Hantschk and Vortmeyer [13]) as well as the oscillation's behavior for both cases, the straight resonator and a right-angle bend. To account for curvature, we utilized a modified grid that was curved 90° over a distance of 80 mm (measured from the open end). Thus, the total length of the engine remained constant, in order to ensure equal resonance conditions and operating frequencies. The resonator was the only section that was modified for this investigation, and the node count on

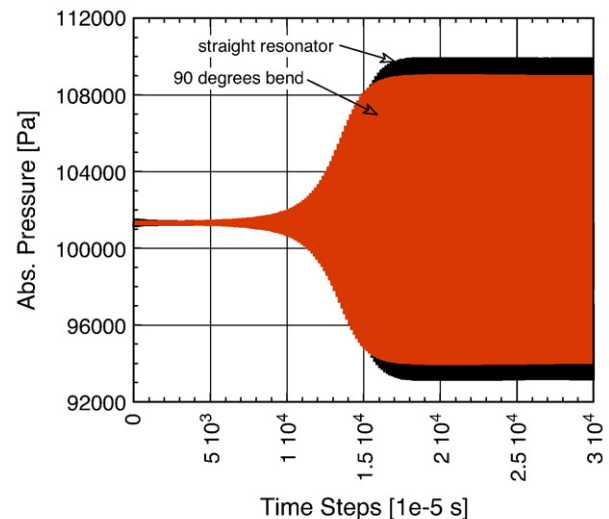


Fig. 3. Effect of a curved resonator on thermoacoustic oscillations, comparison between 0° and 90°.

the sides of the resonator was maintained as constant for all cases, which ensured a close to identical mesh count between the straight and curved geometry. As a result, a different pressure behavior is a result of the curvature and not from mesh-specific differences. As a result of the introduced curvature, we can see that the total amplitude of the pressure oscillations is decreased. A close-up of the fully developed region is shown in Fig. 4. It becomes obvious that for the case of a gradually curved resonator, the pressure amplitude is affected, but the frequency of oscillations remains the same. This is not the case if the curvature of the resonator is applied over a shorter distance (i.e. the resonator is subject to more severe curvature).

3.2. Variation of severity of curvature

Above, it was shown that the introduction of curvature causes a decrease of pressure amplitude achieved by the TAE. While the 90° bend was initially applied over a distance of 80 mm, we also investigated the same degree of curvature applied over a length of 40 mm. Fig. 5 shows a detailed view of the steady oscillations. We can see that a change in the severity changes the frequency of the oscillations. While the smooth curvature of 90° applied over 80 mm yields a

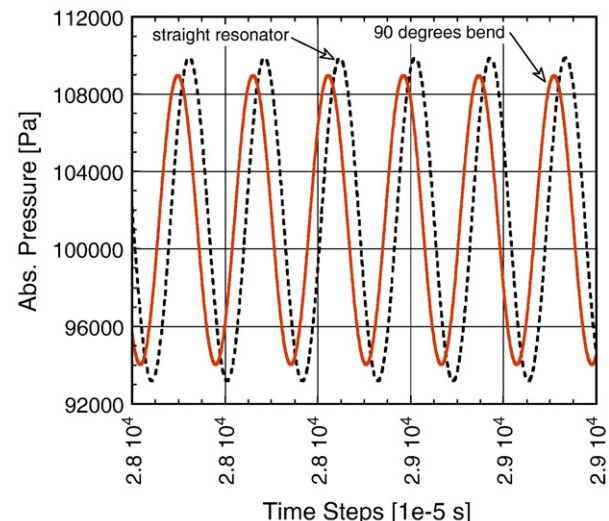


Fig. 4. Detailed view of the effect of curvature (0° and 90°).

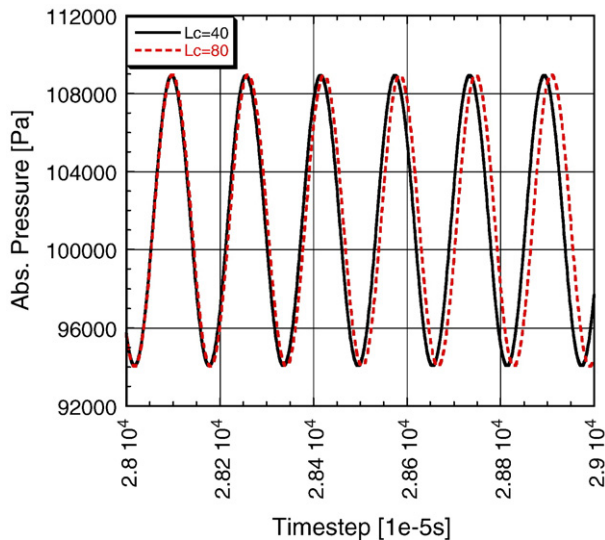


Fig. 5. Effect of the severity of resonator curvature on thermoacoustic oscillations (90° applied over 80 mm and 40 mm).

frequency of $f = 614$ Hz as in the previous cases, the same curvature applied over 40 mm yields an increased frequency of $f = 629$ Hz. It seems to mimic a shorter resonance tube, thus increasing the frequency. The actual tube length now does not directly correspond to the operating frequency. On the other hand, the amplitude of the oscillations is not affected as the severity of curvature increases.

4. Conclusion

In order to advance the application of thermoacoustic devices, their footprint should be decreased. We identified the introduction of curvature to the resonator as one approach to achieve this reduction of the footprint. To investigate the effect of curvature on the performance of a thermoacoustic engine, we have developed a successful simulation of said engine in Fluent. Using a small pressure disturbance and a driving temperature gradient across the modeled stack as the only energy input, we were able to replicate the thermoacoustic effect through the amplification of pressure waves. Our model moved beyond the investigation of an individual thermoacoustic couple and was utilized to quantify (qualitatively) the influence of resonator curvature on the engine's ability to sustain strong thermoacoustic oscillations. As a conclusion, we showed that curvature in the resonator influences both the amplitude and the frequency of the sound waves, depending on the severity of curvature. Both effects must be considered when thermoacoustic refrigerators are designed, because a small change in operating conditions can result in drastic changes in performance. The effects are summarized below (pressure amplitude p [Pa], frequency f [Hz], respective changes denoted by Δ [%]):

- Straight resonator (reference case): $p = 8584$ and $f = 614$
- 90°, 80 mm curved: $p = 7698$, $\Delta p = -10.3$, $f = 614$, $\Delta f = 0$
- 90°, 40 mm curved: $p = 7625$, $\Delta p = -11.2$, $f = 629$, $\Delta f = +2.4$.

Acknowledgement

This work is supported by the NSF under the grant CBET-0729905.

References

- [1] S.L. Garrett, Reinventing the engine, *Nature* 339 (1999) 303–305.
- [2] S.C. Kaushik, S. Kumar, Finite time thermodynamic analysis of endoreversible Stirling heat engine with regenerative losses, *Energy* 25 (2000) 989–1003.
- [3] P.H. Ceperley, Gain and efficiency of a short traveling wave heat engine, *Journal of the Acoustical Society of America* 77 (3) (1985) 1239–1244.
- [4] G.W. Swift, *Thermoacoustics: A Unifying Perspective for Some Engines and Refrigerators*, Acoustical Society of America, Melville NY, 2002.
- [5] P. H. Ceperley, Us pat. no. 4114380 (1978).
- [6] S.L. Garrett, Resource letter: Ta-1: thermoacoustic engines and refrigerators, *American Journal of Physics* 72 (1) (2004) 11–17.
- [7] P.H. Ceperley, A pistonless Stirling engine – the traveling wave heat engine, *Journal of the Acoustical Society of America* 66 (5) (1979) 1508–1513.
- [8] N. Kagawa, *Regenerative Thermal Machines*, International Institute for Refrigeration, Paris, 2000.
- [9] M. E. Poese, R. W. Smith, S. L. Garrett, R. van Gerwen, P. Gosselin, Thermoacoustic refrigeration for ice cream sales, in: *Proceedings of 6th IIR Gustav Lorentzen Conference*, 2004.
- [10] P. E. Phelan, J. Swanson, F. Chiriac, V. Chiriac, Designing a mesoscale vapor-compression refrigerator for cooling high-power microelectronics, *Thermal and Thermomechanical Phenomena in Electronic Systems (ITHERM'04)*.
- [11] C. Herman, Z. Travnicek, Cool sound: the future of refrigeration? Thermodynamic and heat transfer issues in thermoacoustic refrigeration, *Heat and Mass Transfer* 42 (2006) 492–500.
- [12] J.A. Lycklama À Nijeholt, M.E. Tijani, S. Spoelstra, Simulation of traveling wave thermoacoustic engine using computational fluid dynamics, *Journal of the Acoustical Society of America* 118 (4) (2005) 2265–2270.
- [13] C.-C. Hantschk, D. Vortmeyer, Numerical simulation of self-excited thermoacoustic instabilities in a rijke tube, *Journal of Sound and Vibration* 277 (9) (1999) 758–763.
- [14] K.J. Bastyr, R.M. Keolian, High-frequency thermoacoustic-Stirling heat engine demonstration device, *Acoustics Research Letters Online* 4 (2) (2003) 37–40.
- [15] B. Entezam, W.K. van Moerhem, J. Majdalani, Two-dimensional numerical verification of the unsteady thermoacoustic field inside a rijke-type pulse combustor, *Numerical Heat Transfer; Part A: Applications* 41 (3) (2002) 245–262.
- [16] L. Zoonjens, Numerical investigation of the performance and effectiveness of thermoacoustic couples, Ph.D. thesis, School of Mechanical Engineering, The University of Adelaide (2008).
- [17] H. Ozoe, N. Sato, W.S. Churchill, Numerical analyses of two- and three-dimensional thermoacoustic convection generated by a transient step in the temperature of one walls, *Numerical Heat Transfer; Part A: Applications* 18 (1) (1990) 1–15.
- [18] N. Cao, J.R. Olson, G.W. Swift, S. Chen, Energy flux density in a thermoacoustic couple, *Journal of the Acoustical Society of America* 99 (6) (1996) 3456–3464.
- [19] E. Besnoin, O.M. Knio, Numerical study of thermoacoustic heat exchangers in the thin plate limit, *Numerical Heat Transfer; Part A: Applications* 40 (2001) 445–471.
- [20] E. Besnoin, Numerical study of thermoacoustic heat exchangers, Ph.D. thesis, Johns Hopkins University (2001).
- [21] A.S. Worlikar, O.M. Knio, Numerical study of oscillatory flow and heat transfer in a loaded thermoacoustic stack, *Numerical Heat Transfer; Part A: Applications* 35 (1) (1999) 49–65.
- [22] H. Ishikawa, D. Mee, Numerical investigations of flow and energy fields near a thermoacoustic couple, *The Journal of the Acoustical Society of America* 111 (2002) 831.
- [23] D. Marx, P. Blanc-Benon, Computation of the mean velocity field above a stack plate in a thermoacoustic refrigerator, *Comptes rendus-Mécanique* 332 (11) (2004) 867–874.
- [24] D. Marx, P. Blanc-Benon, Numerical simulation of stack-heat exchangers coupling in a thermoacoustic refrigerator, *AIAA Journal* 42 (2004) 1338–1347.
- [25] D. Marx, P. Blanc-Benon, Numerical calculation of the temperature difference between the extremities of a thermoacoustic stack plate, *Cryogenics* 45 (3) (2005) 163–172.
- [26] D. Marx, P. Blanc-Benon, Computation of the temperature distortion in the stack of a standing-wave thermoacoustic refrigerator, *The Journal of the Acoustical Society of America* 118 (2005) 2993.
- [27] A. Piccolo, G. Pistone, Estimation of heat transfer coefficients in oscillating flows: the thermoacoustic case, *Int. Journal of Heat and Mass Transfer* 49 (2006) 1631–1642.
- [28] J. Liu, S.L. Garrett, Relationship between Nusselt number and the thermoviscous (Rott) functions, *Journal of the Acoustical Society of America* 119 (3) (2006).